

UCR-ST-B5-EU

UCR-ST-xxx

Power supply

Operating voltage range	9 ... 30 V DC, 4 pin DC connector
Frequency range	-4G (LTE-FDD): B1, B3, B7, B8, B20, B28A -3G: B1, B8 -2G: B3, B8

Inputs

Number of digital inputs	1
--------------------------	---

Outputs

Number of transistor outputs	1
------------------------------	---

Memory

Database size	64
---------------	----

Communication

Connections	Ethernet
-------------	----------

General data

Storage temperature (no ice)	-40 ... 75 °C
Operation temperature	-40 ... 75 °C
Dimensions	83 x 74 x 25 mm
Mounting	DIN rail

Product references

Description	Type	24
4G, 3G, 2G Cellular Router B5 for Europe	UCR-ST-B5-EU	✓
Other devices on request. Please contact support@comatreleco.com .		

Accessories

DIN rail kit for UCR B5/B8	UCR-OP-B5-DIN
----------------------------	---------------



fig. 1. Wiring diagram


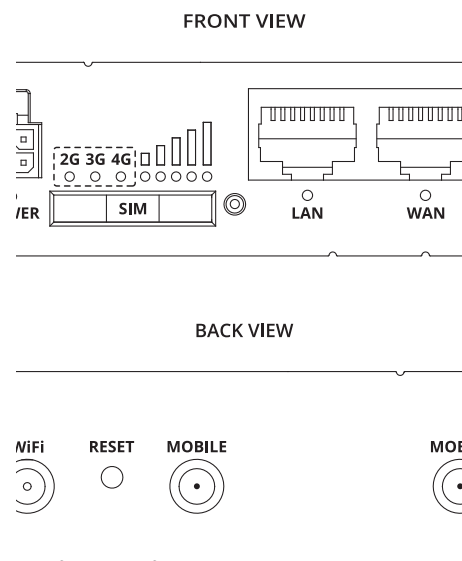


fig. 2. Dimensions (mm)



Technical approvals, conformities

