

CT3-A30/U UC180-265V
Single function | multivoltage



Table with 2 columns: Timing functions, Timing range, Timing scale. Values include 0.2 s ... 3 s, 2 s ... 30 s, 0.2 min ... 3 min, etc.

Table with 3 columns: Control circuit, Nominal voltage, Operating voltage range, Power consumption AC / DC, Current consumption on supply A1-A2 AC / DC, Current consumption on input control B1 AC / DC, Threshold voltage on input control B1 AC / DC, Frequency range. Values range from 9.5V to 265V and 0.2mA to 12mA.

Table with 3 columns: Control circuit, Nominal voltage, Operating voltage range, Power consumption AC / DC, Current consumption on supply A1-A2 AC / DC, Current consumption on input control B1 AC / DC, Threshold voltage on input control B1 AC / DC, Frequency range. Values range from 9.5V to 265V and 0.2mA to 12mA.

Table with 3 columns: Control circuit, Nominal voltage, Operating voltage range, Power consumption AC / DC, Current consumption on supply A1-A2 AC / DC, Current consumption on input control B1 AC / DC, Threshold voltage on input control B1 AC / DC, Frequency range. Values range from 90V to 265V and 0.2mA to 2mA.

Table with 2 columns: General data, Storage temperature (no ice), Operation temperature, Conductor cross section control / main circuit, Nominal screw torque control / main circuit, Dimensions, Weight, Ingress Protection, Housing material. Values include -40 ... 85 °C, 2.5 mm², 0.5 Nm, 35 g, IP 20, PC.

Table with 3 columns: Product references, Description, Type, 180-265. Includes Off-delay CT3-A30/U UC...V and a note about other voltages on request.

Table with 2 columns: Accessories, Socket, Retaining spring | steel. Values include S3-B, S3-M and HF-33 (BAG 10 PCS).

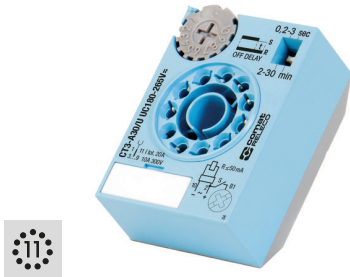


fig. 1. Wiring diagram


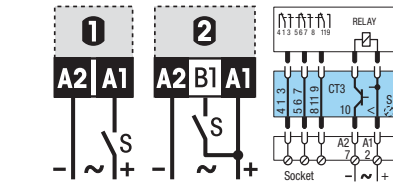


fig. 2. Dimensions (mm)

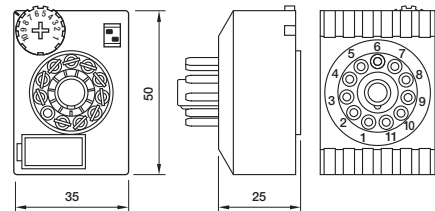

Technical approvals, conformities

Standards IEC/EN 61812-1
Approvals CE, c, UL, EAC, UK