


Interface-Baustein
Module d'Interface
Interface module

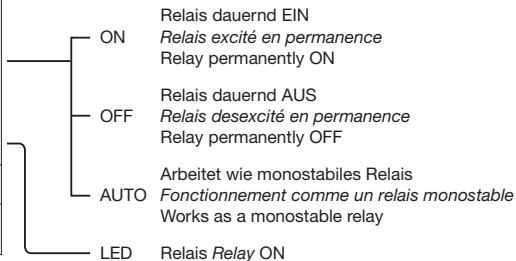


66915-006-54-003

Funktionen *Fonctions* **Functions**

Funktionsschalter <i>Sélecteur de fonction</i> Selector switch	(A3)	Relais <i>Relay</i> ON (11 - 14)	LED	Meldekontakt <i>Contact de signalisation</i> Signal contact (B1 - B2)
ON		ON	ON	OFF
OFF		OFF	OFF	OFF
AUTO	SON	ON	ON	ON
	SOFF	OFF	OFF	ON

Anschlüsse *Raccordements* **Connections**

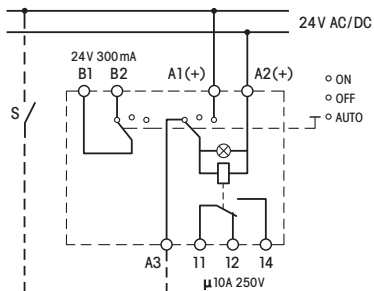

Daten bei $T_u = 20^\circ\text{C}$

Données à T_{amb} .

Data at T_{amb} .

Leistungskontakt

Contact de puissance

Power contact

Meldekontakt

Contact de signalisation

Signal contact

Schaltstrom/-spannung <i>Courant/tension de coupure</i> Switching current/voltage		10A 250V	300mA / 24V
Schaltleistung <i>Puissance de coupure</i> Switching power	AC1	2500VA	—
Schaltleistung <i>Puissance de coupure</i> Switching power	AC15	500VA / 230V	—
Schaltleistung <i>Puissance de coupure</i> Switching power	DC1	...250W	—
Einschaltstrom <i>Courant de démarrage</i> Peak inrush current		15A 20ms	—

Betriebsspannung <i>Tension de service</i> Operation voltage		AC 50/60Hz // DC 0,8...1,1U _N
Leistungsaufnahme <i>Puissance absorbée</i> Power consumption	P _{max}	400mW
Betriebstemperatur <i>Température de service</i> Operating temperature		-20...+50°C

