

CRINT-R31/DC24V
1 pole | changeover contact, dual terminal



Table with 2 columns: Specification (e.g., Verfügbare Kontaktmaterialien, Maximale Kontaktbelastbarkeit AC) and Value (e.g., AgSnO2, 16A / 250 V).

Table with 2 columns: Specification (e.g., Betriebsspannungsbereich, Ansprechspannung) and Value (e.g., 0.7 UN ... 1.25 UN, ≤ 0.7 UN).

Table with 2 columns: Specification (e.g., Prüfspannung offener Kontakt, Prüfspannung Kontakt / Spule) and Value (e.g., 1 kV / 1min, 5 kV / 1 min).

Table with 2 columns: Specification (e.g., Lagertemperatur, Betriebstemperatur) and Value (e.g., -40...85 °C, -40...85 °C).

Table with 3 columns: Beschreibung, Typ, and a reference number (24). Includes a note about listing control voltage.



fig. 1. Verdrahtungsdiagramm




fig. 2. Wechselstrom-Schaltzyklen




fig. 3. Gleichstrom-Grenzlastkurve





fig. 4. Abmessungen (mm)

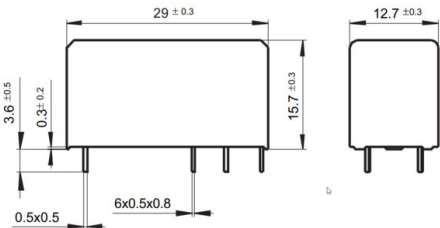

Technische Zulassungen, Konformitäten

Normen IEC/EN 61810
Zulassung CE cULus ENEC