

UCR-ST-B8-EU
UCR-ST-xxx

Power supply		
Operating voltage range	9 ... 30 V DC, 4 pin DC connector	
Power consumption DC	< 5 W	
Frequency range	-4G (LTE-FDD): B1, B3, B7, B8, B20, B28A -4G (LTE-TDD): B38, B40, B41 -3G: B1, B8 -2G: B3, B8	
Inputs		
Number of digital inputs	3	
Number of analog inputs*	1	
Outputs		
Number of relay outputs	1	
Number of transistor outputs	2	
Memory		
Database size	128	
Memory card	Micro SD-Card	
Communication		
Connections	Ethernet RS232 RS485	
General data		
Storage temperature (no ice)	-40 ... 75 °C / -40 ... 167 °F	
Operation temperature	-40 ... 75 °C / -40 ... 167 °F	
Dimensions	100mm x 110mm x 50mm	
Mounting	DIN rail	
Product references		
Description	Type	24
4G, 3G, 2G Cellular Router B8 for Europe	UCR-ST-B8-EU	✓
Other devices on request. Please contact support@comatreleco.com .		
Accessories		
DIN rail kit for UCR B5/B8	UCR-OP-B5-DIN	



fig. 1. Wiring diagram


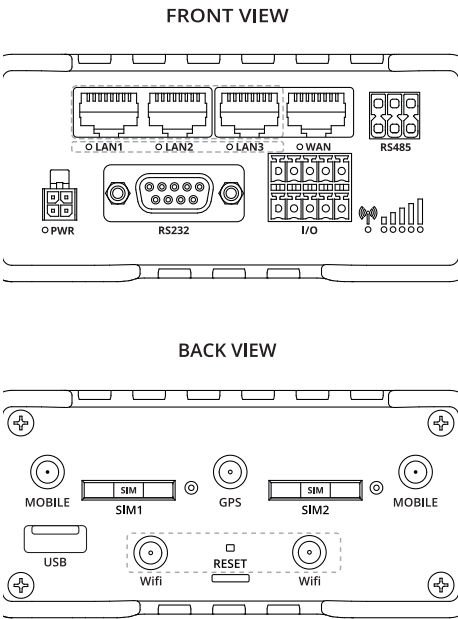


fig. 2. Dimensions (mm)



Technical approvals, conformities

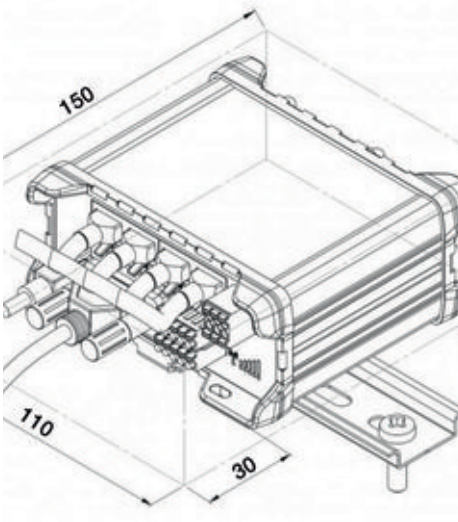