

Time data

Timing functions

fig. 1 2: E, A, K, W, H, N, M, B, G, F, Q, I, P 3: E, W, H, B, I, P 4: U, V
0.01 s ... 60 dTiming range
Timing scale**Main circuit**

Number of contacts

2 CO

Available contact materials

 AgNi

Rated voltage

250 V

Rated current

5 A

Minimum load

10 mA, 12 V

Inrush current

10 A, 10 ms

Rated load DC

fig. 3

Rated load AC-1

1,250 VA

Mechanical endurance (cycles)

5 000 000

Electrical endurance at rated load AC-1 (cycles)

fig. 2

Control circuit

Nominal voltage

24 ... 60 V AC / DC

Operating voltage range

19 ... 75 V AC / DC

Power consumption AC / DC

2 VA / 2 W

Current consumption on supply A1-A2 AC / DC

80 mA / 80 mA

Current consumption on input control B1 AC / DC

6.3 mA / 6.3 mA

Threshold voltage on input control B1 AC / DC

11 V / 11 V

Frequency range

0; 50 ... 400 Hz

Insulation

Rated test voltage control / main circuit

2 kV rms / 1 min

Rated test voltage main / main circuit

2 kV rms / 1 min

Rated test voltage open contact

1 kV rms / 1 min

Pollution degree

2

Overvoltage category

III

General data

Storage temperature (no ice)

-40 ... 85 °C

Operation temperature

-25 ... 60 °C

Dimensions

fig. 4

Weight

80 g

Ingress Protection

IP 20

Housing material

PC

Product references

Description	Type	24-60
AC / DC Supply	C55/UC...V	✓

Other voltages on request. Please contact support@comatreleco.com.

«...» List control circuit voltage to complete product references.

Accessories

Socket

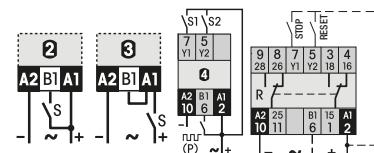
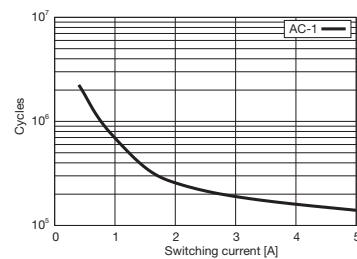
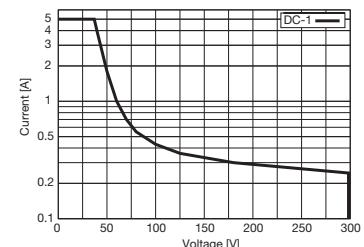
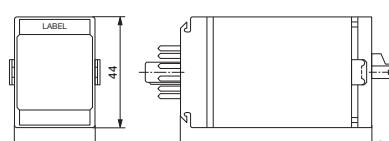
S3-M

Frontpanel mounting set

FZ-50L

Retaining spring | steel

HF-50 (BAG 10 PCS)

**fig. 1. Wiring diagram****fig. 2. AC voltage endurance****fig. 3. DC load limit curve****fig. 4. Dimensions (mm)****Technical approvals, conformities**

Standards IEC/EN 61812-1

Approvals 