
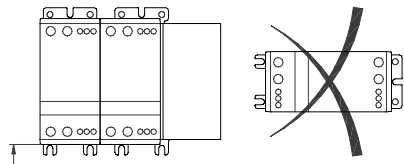



Montering - Mounting
 Montage - Montage


80 mm min.









DK: Hvis enheden er monteret vandret, skal driftsstrømmen reduceres med 50%. Køleplade skal holdes ren. Luftstrømmen må ikke blokeres

EN: If the unit is mounted horizontally the current must be derated by 50%



DE: Falls Einheit horizontal montiert wird, muss der Strom um 50% reduziert werden

FR: En cas montage horizontal, réduire le courant de 50%


 Dimensioner - Dimensions
 Dimensionen - Dimensions


DK: Køleplade skal holdes ren. Luftstrømmen må ikke blokeres

EN: Keep heatsink clean. Airflow must not be blocked

DE: Kühlflächen freihalten. Luftstrom muss ungehindert fließen

FR: Maintenir les plaques de refroidissement libres, l'air doit pouvoir circuler


Forbindelse - Wiring - Verdrahtung - Cablage

75°C Cu Wire/Kabel	mm ²	mm ²
*	1 x 1.5 - 6	1 x 0.5 - 1.5
	2 x 1.5 - 6	2 x 0.5 - 0.75
*	1 x 1.5 - 6	1 x 0.5 - 1.5
	2 x 1.5 - 6	2 x 0.5 - 1.5
*	1 x 1 - 10	1 x 0.5 - 1.5
	2 x 1 - 6	2 x 0.5 - 1.5
	Pozidrive 2 1.2 Nm max.	
	6 mm 1.2 Nm max.	3 mm 0.4 Nm max.


* UL Tested

- Vigtigt (Overhold max skrue drejningsmomenter)
 - Important: (Observe the maximum screw torque limits)
 - Wichtig: (Max. Drehmoment beachten)
- Do not connect power factor correction capacitors to the output.


CC1



CC2



CC2



Use thermal overload protection as required by the National Electric Code.
 When protected by a non-time delay K5 or H Class fuse, rated 266 % of motor FLA, this device is rated for use on a circuit capable of delivering not more than 5,000 rms. symmetrical amperes, 600 V maximum.
 Maximum surrounding temperature 40°C.

DK: Se specifikationer i datablad

EN: See recommendation in datasheet

DE: Empfehlungen im Datenblatt beachten