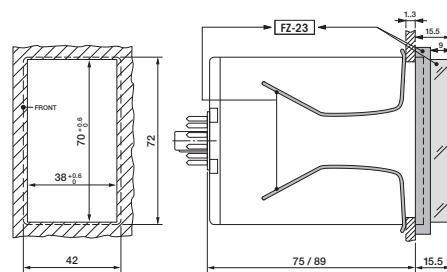


**Front panel mounting set | Retaining clip**
**General data**

Ambient temperature storage	-40 ... 85 °C
Ambient temperature operation	-25 ... 60 °C
Module width	fig. 1
Weight	19 g

**Product references**

Types	Product reference
Front panel mounting set	FZ-23

**fig. 1. Dimensions (mm)**

	Description																
	MRE-44S	MRN11	MRM11R	MRN32	MRM32R	MRU11	MRU32	MV53	SSU34	SSU31	SSU33L	MR11	MR132	TSR19	ESU-D2R	C1515R	C1524R
Monitoring																	
One phase voltage monitoring		●	●				●	●									
Three phase voltage monitoring				●	●		●	●	●								
Four channel voltage measuring	●																
DC Voltage monitoring		●	●	●	●	●	●	●		●						●	
One phase current monitoring		●	●									●					
Three phase current monitoring				●	●							●					
Four channel current measuring	●																
DC current monitoring		●	●	●	●							●	●			●	
Phase failure				●	●		●	●	●	●	●	●	●				
Phase sequence monitoring	●			●	●		●	●	●	●	●	●	●				
Phase angle monitoring / measuring*	●			●	●		●	●	●	●	●	●	●				
Differential voltage monitoring / measuring*	●								●	●	●	●					
Neutral failure monitoring	●								●	●	●						
Frequency monitoring / measuring*	●	●	●	●	●	●	●	●	●	●	●	●	●				
Apparent power monitoring / measuring*	●	●	●	●	●	●	●	●									
Active power monitoring / measuring*	●	●	●	●	●	●	●	●									
Power factor monitoring / measuring*	●	●	●	●	●	●	●	●									
Active energy measuring	●																
THDI / THDU measuring	●																
PTC monitoring												●					
Earth failure monitoring												●					
Functions																	
Threshold exceeded "over" fig. 3.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Threshold undershot "under" fig. 4.	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Window function "inside" fig. 2.	●	●	●	●	●	●	●	●				●	●		●	●	
Window function "outside" fig.1.	●	●	●	●	●	●	●	●				●	●		●	●	
Alarm on-delay	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Alarm off-delay	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Error storage function	●	●	●	●	●	●	●	●				●	●	●			
Threshold selectable	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Threshold fixed										●	●	●	●	●			
Power supply																	
Supply isolated from measuring circuit	●	●	●	●	●	●	●	●				●	●	●	●		
Supply from measure circuit									●	●	●	●			●	●	
Mounting																	
DIN rail mounting	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
Housing according IEC/EN 43880 (electrical distribution mounting)	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
Plug-in (socket mounting)										●	●	●	●	●	●		

\*Measuring: MRE-44S only

fig. 1. Outside




fig. 2. Inside




fig. 3. Over




fig. 4. Under

