

S9-P

14-pin C9 relay socket | PCB

General data

Rated load	6 A / 150 V
Dielectric strength	
- Pin / pin	1.5 kV rms / 1 min
Storage temperature (no ice)	-40 ... 80 °C
Operation temperature	-40 ... 60 °C
Weight	12 g
Housing material	PBT

Accessories

Retaining clip Plastic	CP-07B (BAG 50PCS)
--------------------------	--------------------




fig. 1. Printed circuit lay-out (mm)


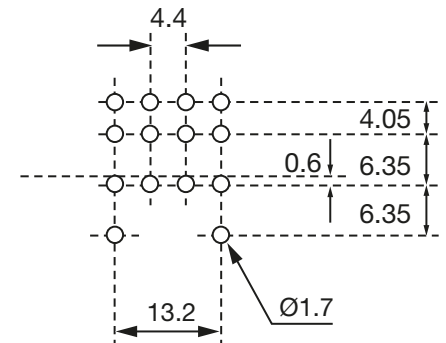


fig. 2. Dimensions (mm)

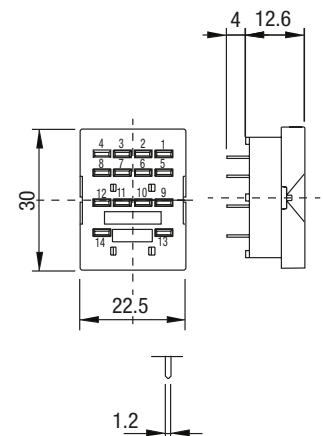

Technical approvals, conformities

Standards EN 60664-1

Approvals    