

S4-P

14-pin C4 Relay socket | PCB



General data	
Rated load	10 A / 250 V
Dielectric strength	
- Pin / pin	2.5 kV rms / 1 min
Storage temperature (no ice)	-30 ... 60 °C
Operation temperature	-30 ... 60 °C
Weight	21 g
Housing material	PBT

Optional Accessories	
Retaining spring for C5 / C5x Relays steel	S4-CL (BAG 10 PCS)

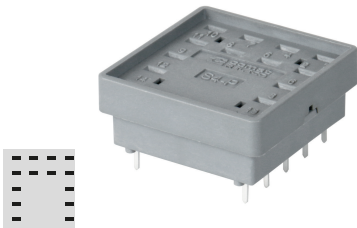


fig. 1. Printed circuit lay-out (mm)



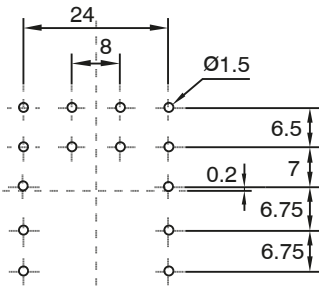


fig. 2. Dimensions (mm)

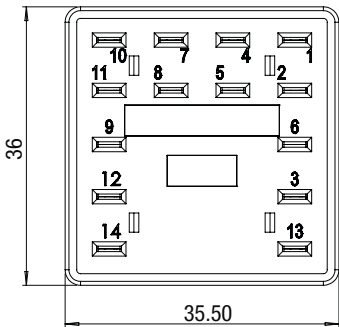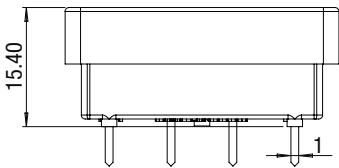

Technical approvals, conformities

Standards EN 60664-1

Approvals   