

MV LKM 254
Analogue transmitter for PT100 / PT1000 | 0 ... 10 V output



Housing and environmental conditions	
Storage temperature (no ice)	-25 ... 85 °C
Operation temperature	-25 ... 85 °C
Ingress Protection	IP 20
Weight	35 g
Housing material	PC-F
Mounting	DIN rail
Dimensions	see fig. 2

Wiring	
Contact type control / main circuit	Screw connection
Conductor cross section control / main circuit	0.2 ... 2.5 mm ²


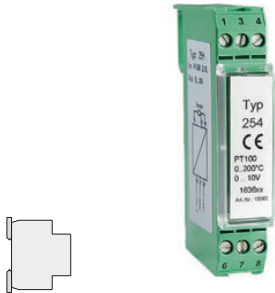


fig. 1. Dimensions (mm)

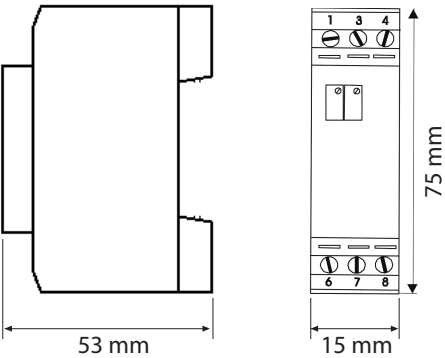

Technical approvals, conformities

Standards EN 61326-1; EN 61326-2-3

Approvals  