

GW-KNX1
GW-xxx




Power supply	
Operating voltage range	9 ... 30 V DC or 12 ... 24 V AC
Communication	
Connections	RS485 KNX Ethernet
General data	
Operation temperature	-40 ... 75 °C / -40 ... 167 °F
Mounting	Wall mounting
Relative humidity, no condensation	5 ... 90 %

Product references		
Description	Type	9-30
Communication Gateways	GW-KNX1	✓
Other devices on request. Please contact support@comatreleco.com .		
The FieldServer software is available free of charge on https://us.msasafety.com to download		



fig. 1. Dimensions (mm)

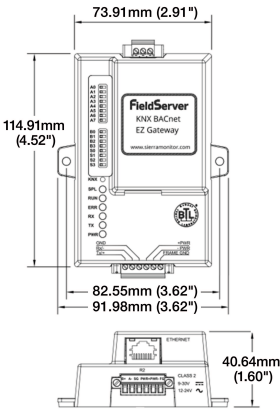

Technical approvals, conformities

Standards CSA C22-2; EN 50491-3; EN 60950-1

Approvals