

EX-D16A3-TO16
IO-xxx / EX-xxx / EXF-xxx / EXL-xxx

Power supply		
Nominal voltage		24 V DC
Inputs		
Number of digital inputs		16
Number of encoder inputs*		1
Number of analog inputs*		3
Outputs		
Number of transistor outputs		15
General data		
Storage temperature (no ice)		-20 ... 60 °C / -4 ... 140 °F
Operation temperature		0 ... 50 °C / 32 ... 122 °F
Dimensions		see fig. 1
Mounting		DIN rail
Ingress Protection		IP 20 / NEMA1
Relative humidity, no condensation		5 ... 95 %

Product references		
Description	Type	24
16 digital, 1 HSC, 3 analog inputs 15 transistor, 1 PWM/HSO outputs	EX-D16A3-TO16	✓
Other devices on request. Please contact support@comatreleco.com .		


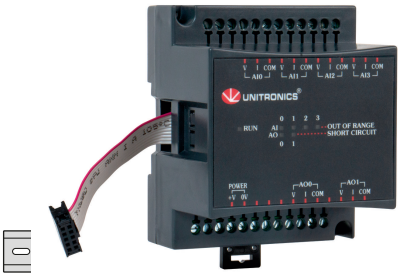


fig. 1. Dimensions (mm)



Technical approvals, conformities

Approvals   