

EX-RC1

IO-xxx / EX-xxx / EXF-xxx / EXL-xxx

General data		
Storage temperature (no ice)	-20 ... 60 °C / -4 ... 140 °F	
Operation temperature	0 ... 50 °C / 32 ... 122 °F	
Dimensions	see fig. 1	
Mounting	DIN rail	
Ingress Protection	IP 20 / NEMA1	
Relative humidity, no condensation	5 ... 95 %	

Product references		
Description	Type	12-24
Remote I/O module adapter	EX-RC1	✓
Other devices on request. Please contact support@comatreleco.com .		


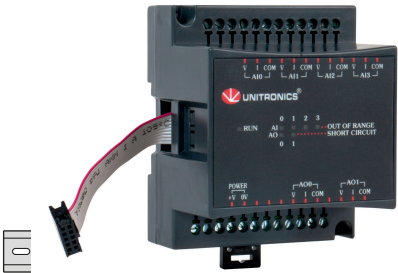


fig. 1. Dimensions (mm)



Technical approvals, conformities

Approvals

CE

UL

UK