

IO-PT4K
IO-xxx / EX-xxx / EXF-xxx / EXL-xxx



Inputs	
Number of temperature inputs	PT1000/Ni1000 Number of temperature inputs

General data	
Storage temperature (no ice)	-20 ... 60 °C / -4 ... 140 °F
Operation temperature	0 ... 50 °C / 32 ... 122 °F
Dimensions	see fig. 1
Mounting	DIN rail
Ingress Protection	IP 20 / NEMA1
Relative humidity, no condensation	5 ... 95 %

Product references		
Description	Type	
4 PT1000/Ni1000		IO-PT4K
Other devices on request. Please contact support@comatreleco.com .		


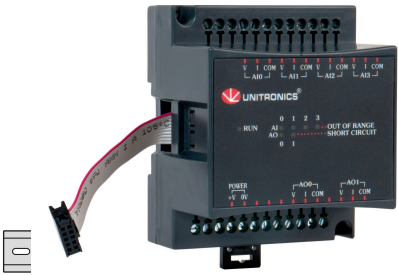


fig. 1. Dimensions (mm)



Technical approvals, conformities

Approvals   