

CCM3H415DS

3 phase | 400 V | 15 A | Starting Torque Limiter with direct switch



Main circuit

Number of outputs	3
Controlled phases	2
Output type	SCR
Rated voltage	400 V
Output voltage range	400 ... 480 V AC
Reverse voltage	1,200 V _{rrm}
Peak reverse voltage	1,300 V _{rrm}
Rated current AC-53b	15 A
Minimum load	250 mA
Leakage current	5 mA
Inrush current	90 A
Rated limit load	1,800 A ² s
Switching frequency (cycles / h)	3,000

Control circuit

Operating voltage range	24 ... 230 V AC/DC
Release voltage	5 V AC/DC
Ramp-up time	N. A. (direct switch)
Ramp-down time	N. A. (direct switch)
Torque adjustment	N. A. (direct switch)
Frequency range	50 / 60 Hz

Insulation

Rated insulation voltage	660 V
Rated impulse withstand voltage open contact	4 kV / 1 min
Pollution degree	3
Overvoltage category	III

General data

Storage temperature (no ice)	-20 ... 80 °C
Operation temperature	-5 ... 40 °C
Ambient temperature operation derated power	-5 ... 60 °C
Conductor cross section control / main circuit	2.5 mm ² / 4 mm ²
Nominal screw torque control / main circuit	0.5 Nm / 1.2 Nm
Dimensions	fig. 2
Weight	650 g
Ingress Protection	IP 20
Housing material	PPO
Mounting	TH35 (EN 60715) or back panel mounting

Product references

Description	Type
Starting Torque Limiter, 3 phase	CCM3H415DS
Other devices on request. Please contact support@comatreleco.com .	

Accessories

Thermal overload protection	P82-100C
-----------------------------	----------



fig. 1. Wiring diagram


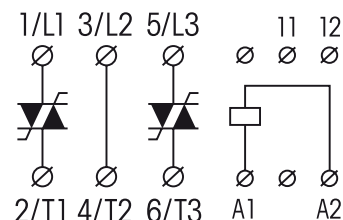


fig. 2. Dimensions (mm)

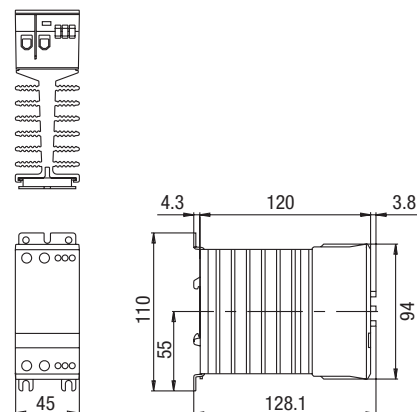

Technical approvals, conformities

Standards IEC/EN 60947-4-2

Approvals