

S7-P

8-pin C7 relay socket | PCB



General data

Rated load	10 A / 250 V
Dielectric strength	
- Pin / pin	2.5 kV rms / 1 min
Storage temperature (no ice)	-40 ... 80 °C
Operation temperature	-40 ... 60 °C
Weight	10 g
Housing material	PBT

Accessories

Retaining clip Plastic	CP-07B (BAG 50PCS)
--------------------------	--------------------

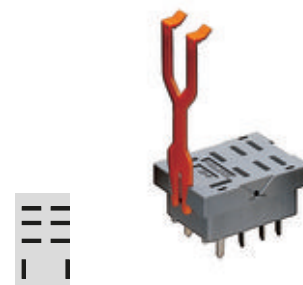


fig. 1. Printed circuit lay-out (mm)


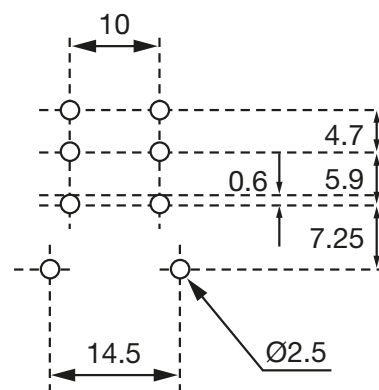


fig. 2. Dimensions (mm)

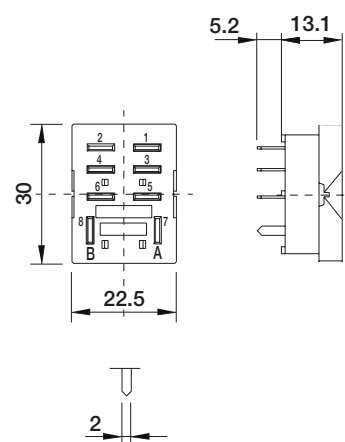

Technical approvals, conformities

Standards EN 60664-1

Approvals   