

CEM01/UC24-240V
Suppressor module



Power supply	
Nominal voltage	24 ... 240 V UC
Operating voltage range	19 ... 250 V
Frequency range	15 ... 63 Hz

General data	
Storage temperature (no ice)	-40 ... 85 °C
Operation temperature	-25 ... 60 °C
Conductor cross section control / main circuit	0.08 ... 2.5 mm ²
Dimensions	fig. 2
Weight	15 g
Ingress Protection	IP20
Housing material	PA 66

Product references		
Description	Type	24-240
Suppressor module	CEM01/UC...V	✓
Other voltages on request. Please contact support@comatreleco.com.		
«...» List control circuit voltage to complete product references.		




fig. 1. Wiring diagram


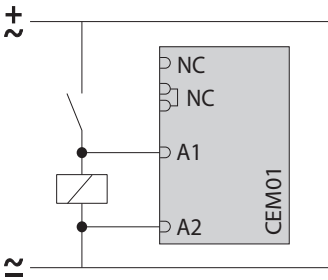


fig. 2. Dimensions (mm)

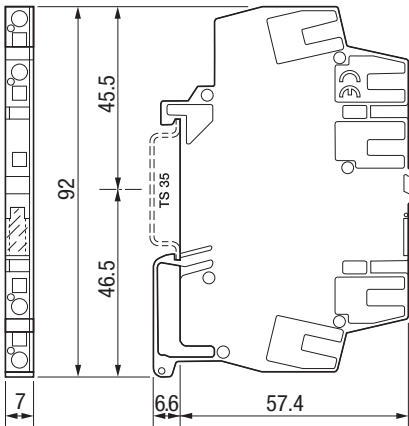

Technical approvals, conformities

Standards EN 60730-1; EN 61000-6-2; EN 61000-6-3
Approvals  