

IO-DI16

IO-xxx / EX-xxx / EXF-xxx / EXL-xxx

Power supply	
Nominal voltage	24 V DC
Inputs	
Number of digital inputs	16
Number of encoder inputs*	1
General data	
Storage temperature (no ice)	-20 ... 60 °C / -4 ... 140 °F
Operation temperature	0 ... 50 °C / 32 ... 122 °F
Dimensions	see fig. 1
Mounting	DIN rail
Ingress Protection	IP 20 / NEMA1
Relative humidity, no condensation	5 ... 95 %

Product references		
Description	Type	24
16 digital, 1 HSC inputs	IO-DI16	✓
Other devices on request. Please contact support@comatreleco.com .		


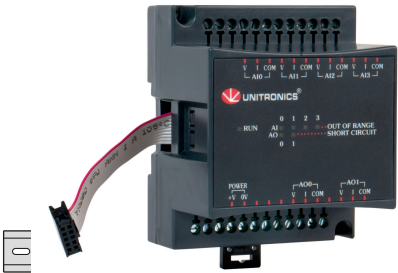


fig. 1. Dimensions (mm)



Technical approvals, conformities

