

S12-P

8-pin C12 relay socket | PCB



General data

Rated load	5 A / 250 V
Dielectric strength	
- Pin / pin	3 kV rms / 1 min
Storage temperature (no ice)	-40 ... 80 °C
Operation temperature	-40 ... 60 °C
Weight	7 g
Housing material	PBT

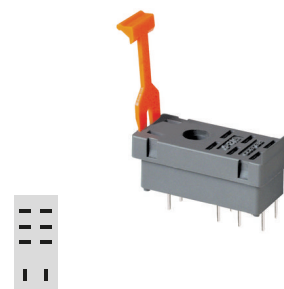


fig. 1. Printed circuit lay-out (mm)


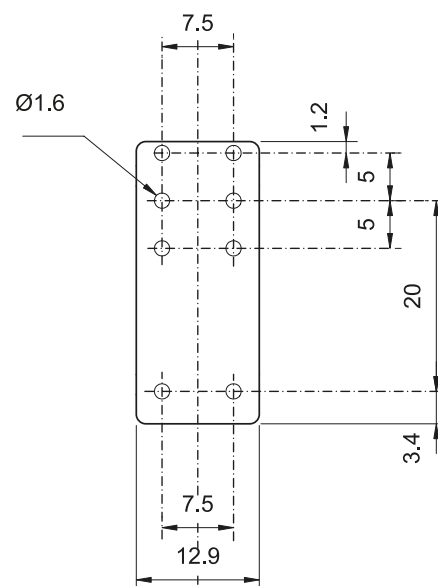


fig. 2. Dimensions (mm)

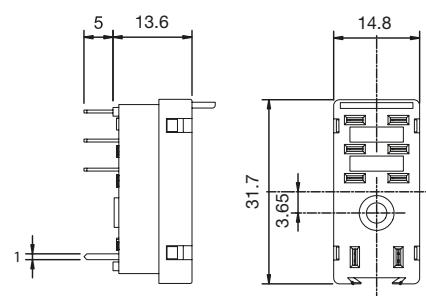

Technical approvals, conformities

Standards EN 60664-1

Approvals