

UAC-CX-01RS2
UAC-xxx / UAC-CB-xxx / UAC-CX-xxx



General data	
Storage temperature (no ice)	-30 ... 70 °C / -22 ... 158 °F
Operation temperature	-20 ... 55 °C / -4 ... 131 °F
Dimensions	see fig. 1
Mounting	DIN rail
Ingress Protection	IP 20 / NEMA1
Relative humidity, no condensation	5 ... 95 %

Product references	
Description	Type
CX Modules	UAC-CX-01RS2
Other devices on request. Please contact support@comatreleco.com .	


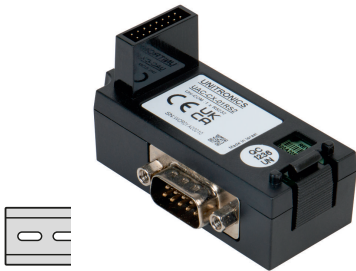


fig. 1. Dimensions (mm)

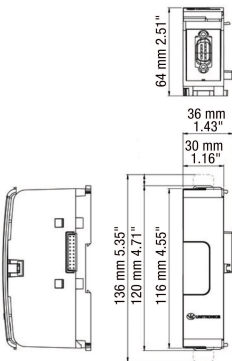

Technical approvals, conformities

Standards IEC 60068-2-27; IEC 60068-2-6

Approvals  