

V350-J-T2
V350-J-xxx

HMI	
Display	3.5" touchscreen, TFT, LCD, resistive, analog, 65 536 (16 bit) colors
Resolution	320 x 240 pixels
Number of keys	5
Number of definable displays	1,024
Power supply	
Nominal voltage	12 ... 24 V DC
Operating voltage range	10.2 ... 28.8 V DC
Inputs	
Number of digital inputs	12
Number of encoder inputs*	3
Number of analog inputs*	2
Outputs	
Number of transistor outputs	12
Memory	
Number of ladder code memory (virtual)	1,000 KB
Number of memory bits (coils)	8,192
Number of memory integers (registers)	4,096
Number of timers	384
Execution time	15 µs / Kb
Memory card	Micro SD-Card
Communication	
Connections	RS232 RS485 USB CAN optional
Protocol	MODBUS TCP, SNMP V1, CANopen, UniCAN, CANlayer2, BACnet, KNX and M-Bus via gateway, FB Protocol: for any 3rd party protocol
General data	
Storage temperature (no ice)	-20 ... 60 °C / -4 ... 140 °F
Operation temperature	0 ... 50 °C / 32 ... 122 °F
Back-up battery	CR2450, 7 years typical at 25 °C, battery back-up for RTC and system data, including variable data
Dimensions	see fig. 1
Mounting	DIN rail, Panel with brackets
Ingress Protection	IP 20 / NEMA1 (DIN rail mounted), IP 65 / NEMA4X (Panel mounted)
Relative humidity, no condensation	10 ... 95 %

Product references


Description	Type	24
10 digital, 2 d/a inputs 12 transistor outputs	V350-J-T2	✓
Other devices on request. Please contact support@comatreleco.com .		
The VisiLogic software is available free of charge on www.unitronicsplc.com at downloads.		

Accessories

Additional Comm Ports	V100-17-ET2, V100-17-RS4X, V100-17-CAN, V100-17-PB1
I/O Expansion Modules	IO-DI8-T08, IO-DI8-R04, IO-DI8-R08, IO-DI16, IO-T016, IO-R08, IO-R016, IO-DI8ACH, IO-AI4-A02, IO-PT400, IO-PT4K, IO-A06X, IO-LC1, IO-LC3, IO-ATC8, IO-AI8, IO-D16A3-R016, EX-D16A3-R08, EX-D16A3-T016, EX-A2X, EX-RC1 EX90-DI8-R08
Routers	UCR-ST-B5-EU, UCR-ST-B8-EU
DIN rail kit for UCR B5/B8	UCR-OP-B5-DIN



fig. 1. Dimensions (mm)

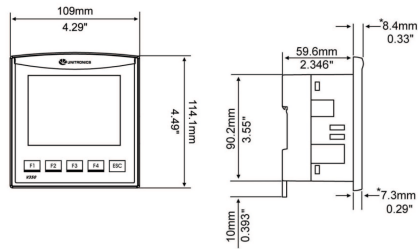

Technical approvals, conformities

Standards IEC 60068-2-27; IEC 60068-2-6

Approvals   