

IO-LC3
IO-xxx / EX-xxx / EXF-xxx / EXL-xxx

Power supply		
Nominal voltage	24 V DC	
Inputs		
Number of digital inputs	1	
Outputs		
Number of transistor outputs	2	
General data		
Storage temperature (no ice)	-20 ... 60 °C / -4 ... 140 °F	
Operation temperature	0 ... 50 °C / 32 ... 122 °F	
Dimensions	see fig. 1	
Mounting	DIN rail	
Ingress Protection	IP 20 / NEMA1	
Relative humidity, no condensation	5 ... 95 %	

Product references		
Description	Type	24
1 digital, 3 loadcell/strain gauge inputs	IO-LC3	✓
1 2 transistor outputs		
Other devices on request. Please contact support@comatreleco.com .		


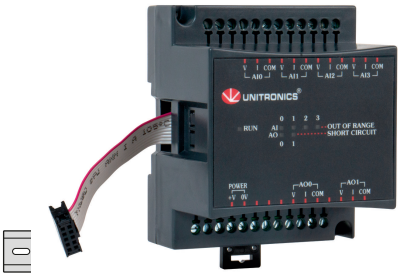


fig. 1. Dimensions (mm)



Technical approvals, conformities

