

# RSC30-300/AC230V

3 pole | 30 A | 15 kW



### Main circuit

|                                                     |                                |
|-----------------------------------------------------|--------------------------------|
| Available contact materials                         | AgNiO <sub>2</sub>             |
| Rated voltage                                       | 1 000 V AC                     |
| Rated current AC-1                                  | 35 A                           |
| Rated current AC-3                                  | 30 A, 400 V                    |
| Rated current DC-3                                  | 1 A, 220 V DC                  |
| Recommended minimum contact load                    | 50 mA, 17 V                    |
| Overload current                                    | 240 A (10 s) / 900 A (0.001 s) |
| Rated load AC-1 single-phase 230 V                  | 23 kW                          |
| Rated load AC-1 three-phase 230 V                   | 15 kW                          |
| Mechanical endurance (cycles)                       | 10 000 000                     |
| Electrical endurance at rated load AC-1 (cycles)    | 200 000                        |
| Electrical endurance at rated load AC-3 (cycles)    | see fig. 2                     |
| Switching frequency at rated load AC-1 (cycles / h) | ≤ 600                          |
| Switching frequency at rated load AC-3 (cycles / h) | ≤ 600                          |
| Switching frequency at rated load DC-3 (cycles / h) | ≤ 300                          |

### Control circuit

|                           |                                                   |
|---------------------------|---------------------------------------------------|
| Nominal voltage           | see table product references                      |
| Operating voltage range   | 0.85 ... 1.1 U <sub>N</sub>                       |
| Pick-up voltage           | ≤ 0.85 U <sub>N</sub>                             |
| Release voltage           | ≥ 0.2 U <sub>N</sub> AC / ≥ 0.1 U <sub>N</sub> DC |
| Pick-up time              | 10 ... 20 ms                                      |
| Release time              | 5 ... 15 ms                                       |
| Power consumption AC / DC | 8.0 VA / 2.5 W                                    |
| Frequency range           | 50 / 60 Hz                                        |

### Insulation

|                                              |              |
|----------------------------------------------|--------------|
| Rated insulation voltage                     | 1 000 V      |
| Rated impulse withstand voltage open contact | 6 kV / 1 min |
| Pollution degree                             | 3            |
| Overvoltage category                         | III          |
| Clearance of open contact                    | 3.6 mm       |

### Wiring

|                                                |                                          |
|------------------------------------------------|------------------------------------------|
| Contact type control / main circuit            | Screw connection, M3.5 / M4              |
| Conductor cross section control / main circuit | 2.5 mm <sup>2</sup> / 10 mm <sup>2</sup> |
| Stripping Length control / main circuit        | 10 mm / 10 mm                            |
| Nominal screw torque control / main circuit    | 1.4 Nm / 1.8 Nm                          |
| Screwdrive control / main circuit              | PZ2 / PZ2                                |

### Housing and environmental conditions

|                                             |                       |
|---------------------------------------------|-----------------------|
| Storage temperature (no ice)                | -30 ... 80 °C         |
| Ambient temperature operation open contact  | -25 ... 55 °C         |
| Ambient temperature operation close contact | -25 ... 45 °C         |
| Relative humidity, no condensation          | 95 %                  |
| Ingress Protection                          | IP 20                 |
| Weight                                      | AC: 320 g / DC: 360 g |
| Color                                       |                       |
| Housing material                            | PA 66                 |
| Operation Altitude                          | Max. 2 000 m          |
| Mounting                                    | DIN rail              |
| Dimensions                                  | see fig. 3            |

### Product references

| Description | Type             | 230 |
|-------------|------------------|-----|
| 3 NO        | RSC30-300/AC...V | ✓   |

Other voltages on request. Please contact support@comatreleco.com.  
«...» List control circuit voltage to complete product references.

### Accessories

|                            |                                                                                                                                                                                                                |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Auxiliary contact          | RSC-AUX02, RSC-AUX04, RSC-AUX11, RSC-AUX20, RSC-AUX22, RSC-AUX40                                                                                                                                               |
| RC - Suppressor            | RSC-RC1, RSC-RC2                                                                                                                                                                                               |
| Bimetallic thermal relay   | RSC-MP-0.16, RSC-MP-0.25, RSC-MP-0.4, RSC-MP-0.5, RSC-MP-0.63, RSC-MP-0.8, RSC-MP-1.0, RSC-MP-1.3, RSC-MP-1.6, RSC-MP-10.0, RSC-MP-2.0, RSC-MP-2.5, RSC-MP-3.2, RSC-MP-4.0, RSC-MP-4.8, RSC-MP-6.3, RSC-MP-7.5 |
| MBL - Mechanical interlock | RSC-MBL1, RSC-MBL2                                                                                                                                                                                             |
| DI - Suppressor            | RMC-DI                                                                                                                                                                                                         |



fig. 1. Wiring diagram




fig. 2. Electrical endurance


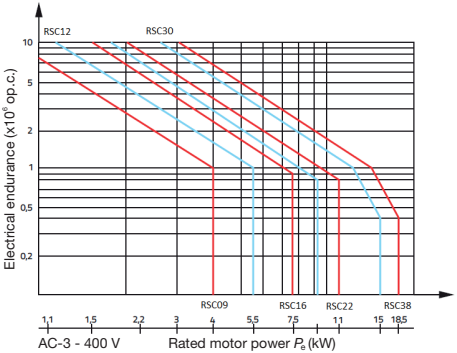


fig. 3. Dimensions (mm)

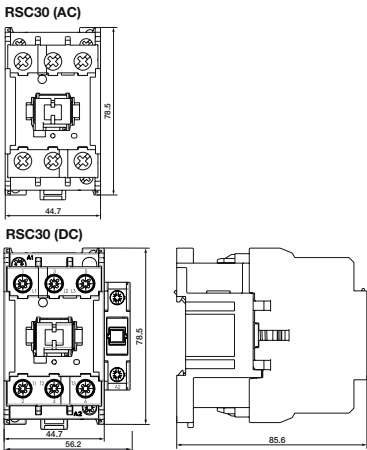

### Technical approvals, conformities

Standards IEC/EN 60947

Approvals