

S10-P
5-pin C10 relay socket | PCB



General data	
Rated load	10 A / 250 V
Dielectric strength	5 kV rms / 1 min
Storage temperature (no ice)	-40 ... 80 °C
Operation temperature	-40 ... 60 °C
Weight	7 g
Housing material	PBT

Accessories	
Retaining clip Plastic	CP-24B (BAG 10 PCS)



fig. 1. Wiring diagram


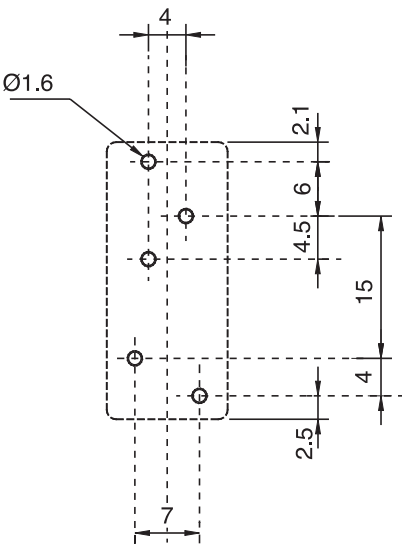


fig. 2. Dimensions (mm)

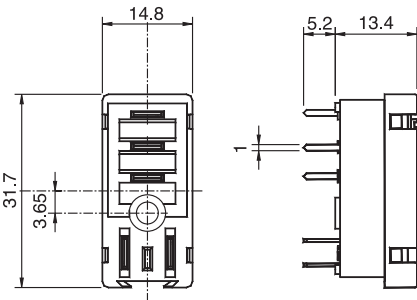

Technical approvals, conformities

Standards EN 60664-1

Approvals   