

EX-D16A3-RO8
 IO-xxx / EX-xxx / EXF-xxx / EXL-xxx



Power supply	
Nominal voltage	24 V DC
Inputs	
Number of digital inputs	16
Number of encoder inputs*	2
Number of analog inputs*	3
Outputs	
Number of relay outputs	8
General data	
Storage temperature (no ice)	-20 ... 60 °C / -4 ... 140 °F
Operation temperature	0 ... 50 °C / 32 ... 122 °F
Dimensions	see fig. 1
Mounting	DIN rail
Ingress Protection	IP 20 / NEMA1
Relative humidity, no condensation	5 ... 95 %

Product references		
Description	Type	24
16 digital, 2 HSC, 3 analog inputs 8 relay outputs	EX-D16A3-RO8	✓
Other devices on request. Please contact support@comatreleco.com .		


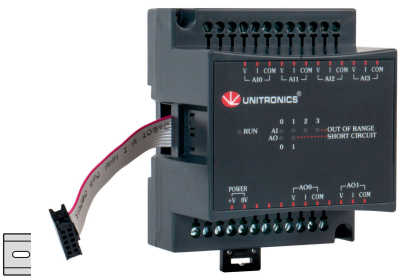


fig. 1. Dimensions (mm)



Technical approvals, conformities

Approvals