
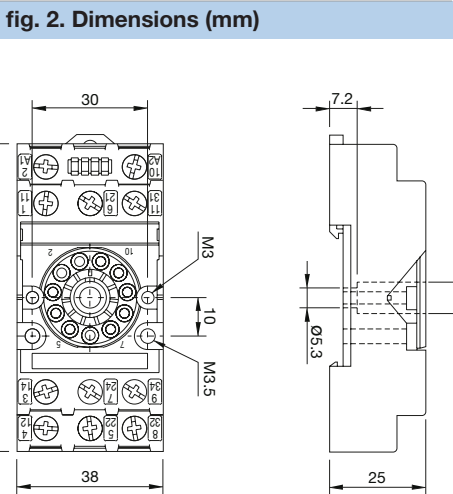
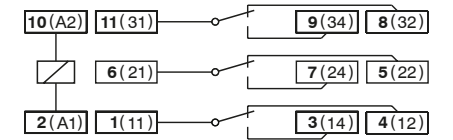


|                              |                                                                |
|------------------------------|----------------------------------------------------------------|
| <b>General data</b>          |                                                                |
| Rated load                   | 10 A / 250 V                                                   |
| Dielectric strength          |                                                                |
| - All terminals / DIN rail   | 2.5 kV rms / 1 min                                             |
| - Terminal / terminal        | 2.5 kV rms / 1 min                                             |
| Conductor cross section      |                                                                |
| - Single wire                | 4 mm <sup>2</sup> / AWG 12 or 2 x 2.5mm <sup>2</sup> / AWG 14  |
| - Multi wire (un-crimped)    | 0.34 mm <sup>2</sup> / AWG 22 ... 2.5 mm <sup>2</sup> / AWG 14 |
| Nominal screw torque         | 0.8 Nm                                                         |
| Screw Dimension              | M3.5 Pozi slot                                                 |
| Mounting                     | TH35 (EN 60715) or back panel mounting                         |
| Storage temperature (no ice) | -40 ... 80 °C                                                  |
| Operation temperature        | -40 ... 60 °C                                                  |
| Weight                       | 69 g                                                           |
| Housing material             | PA / PC                                                        |
| <b>Included Accessories</b>  |                                                                |
| Retaining clip   plastic     | S30-CM/10 (BAG 10 PCS)                                         |
| <b>Optional Accessories</b>  |                                                                |
| Retaining spring   steel     | HF-32 (BAG 10 PCS), HF-33 (BAG 10 PCS)                         |
| Coding ring                  | S3-BC (BAG 5 PCS)                                              |

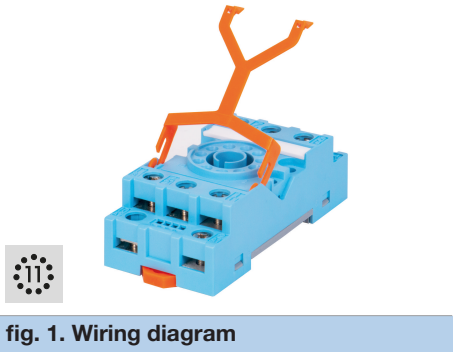

Technical approvals, conformities

Standards EN 60664-1

Approvals