

C10-A18FX/DC24V
1 pole | changeover contact | Faston



Main circuit
Available contact materials
Recommended minimum contact load
Maximum contact load AC
Maximum contact load DC
Inrush current
Rated load AC
Rated load DC
Rated current
Mechanical endurance (cycles)
Electrical endurance at rated load AC-1 (cycles)

Control circuit
Nominal voltage

Coil table
V DC Ohm mA

Insulation
Test voltage open contact
Test voltage contact / coil
Overvoltage category
Insulation resistance at 500 V
Pollution degree

General data
Storage temperature (no ice)
Operation temperature
Pick-up time / bounce time
Release time / bounce time
Maximum switching frequency at rated load
Weight
Housing material

Product references
Description Type

Accessories
Socket



fig. 1. Wiring diagram




fig. 2. AC voltage endurance

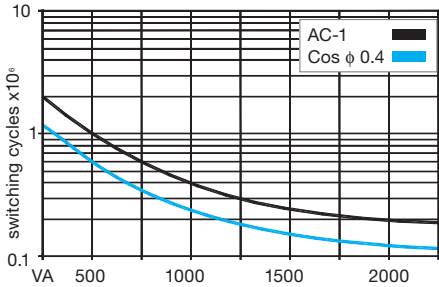


fig. 3. DC load limit curve


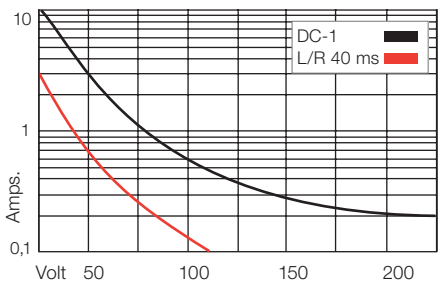


fig. 4. Dimensions (mm)



Technical approvals, conformities

Standards IEC/EN 60947; IEC/EN 61810

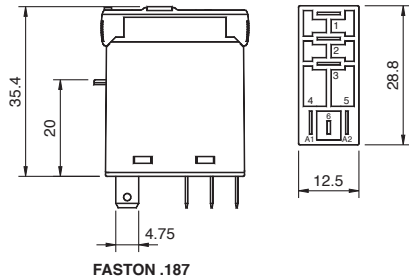