

SSU31/AC400V

3 phase | 1 CO | Phase sequence monitoring



Power supply

Nominal voltage	400 V AC
Operating voltage range	360 ... 470 V
Power consumption AC / DC	10 VA / 1.5 W
Frequency range	45 ... 65 Hz

Measuring circuit

Measured parameters	U
Monitoring functions	Under, phase failure, phase sequence
Number of voltage measurement inputs	3 (L1 / L2 / L3)
Rated AC voltage L-N / L-L	- / 400 V
Undervoltage setting range	≤ 320 V
AC voltage measurement range L-N / L-L	320 ... 400 V
Rated base frequency	45 ... 65 Hz

Main circuit

Number of contacts	1 CO
Available contact materials	AgNi
Rated voltage	250 V AC
Rated current	6 A
Minimum load	10 mA, 5 V
Inrush current	15 A, 20 ms
Rated load DC	fig. 3
Rated load AC-1	1,500 VA
Mechanical endurance (cycles)	30 000 000
Electrical endurance at rated load AC-1 (cycles)	fig. 2

Insulation

Rated test voltage measuring / measuring circuit	2 kV rms / 1 min
Rated test voltage measuring circuit / main circuit	2 kV rms / 1 min
Rated test voltage open contact	1 kV rms / 1 min
Pollution degree	2
Overvoltage category	III

General data

Storage temperature (no ice)	-40 ... 85 °C
Operation temperature	-25 ... 60 °C
Dimensions	fig. 4
Weight	300 g
Ingress Protection	IP 20
Housing material	PC

Product references

Description	Type	400
Three phase monitoring	SSU31/AC...V	✓
Other voltages on request. Please contact support@comatreleco.com.		
«...» List coil voltage to complete product references		

Accessories

Socket	S3-M
Retaining spring I steel	HF-24
Transparent front cover	FS-23
Frontpanel mounting set	FZ-23



fig. 1. Wiring diagram




fig. 2. AC voltage endurance

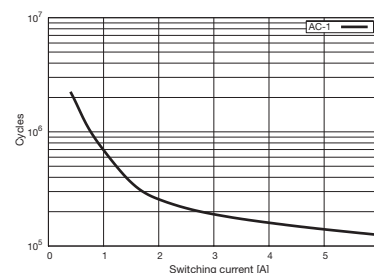


fig. 3. DC load limit curve

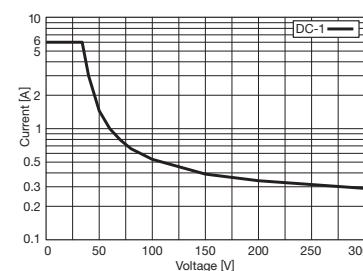


fig. 4. Dimensions (mm)

