

S5-MR

11-pin C5 Relay socket | screw terminal

General data

Rated load	16 A / 400 V
- All terminals / DIN rail	4 kV rms /1 min
- Terminal / terminal	4 kV rms /1 min
- Single wire	1 x 6 mm ² / AWG 10, 2 x 2.5 mm ² / AWG 14
- Multi wire (un-crimped)	1 x 6 mm ² / AWG 10, 2 x 2.5 mm ² / AWG 16
Nominal screw torque	0.8 Nm
Screw Dimension	M3.5 Pozi slot
Mounting	TH35 (EN 60715) or back panel mounting
Storage temperature (no ice)	-40 ... 80 °C
Operation temperature	-40 ... 70 °C
Weight	92 g
Housing material	PA

Included Accessories

Retaining clip plastic	S5M-CP
A2-Bridge	C-A2 (BAG 5PCS)

Optional Accessories

Retaining spring steel	HF-32 (BAG 10 PCS)
A1-, B1-Bridge for S3-Mx, S5-M	SC-3 (BAG 10 PCS)
A2-Bridge	C-A2 (BAG 50PCS)



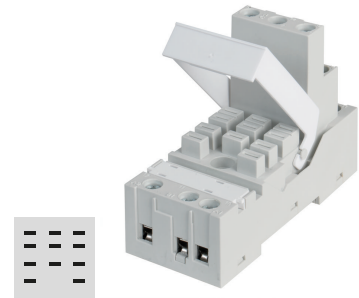


fig. 1. Wiring diagram

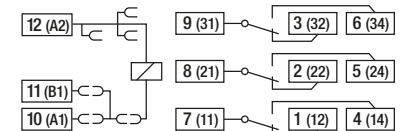

With Bridge Connector SC-3

fig. 2. Dimensions (mm)

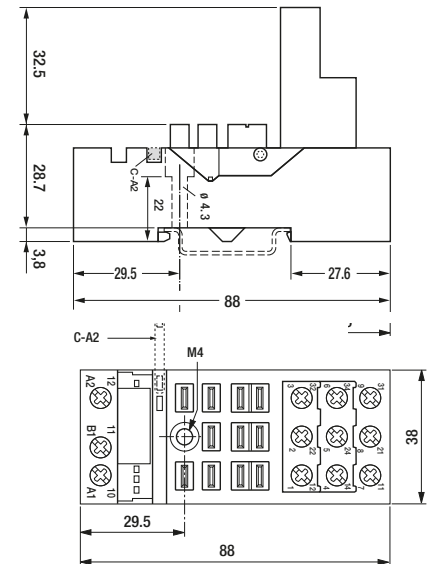

Technical approvals, conformities

Standards EN 60664-1

Railway EN 45545-2; EN 50155

Approvals  