

General data	
Rated load	10 A / 300 V
Dielectric strength	
- All terminals / DIN rail	2.5 kV rms / 1 min
- Terminal / terminal	2.5 kV rms / 1 min
Conductor cross section	
- Single wire	4 mm ² / AWG 12 or 2 x 2.5mm ² / AWG 14
- Multi wire (un-crimped)	0.34 mm ² / AWG 22 ... 2.5 mm ² / AWG 14
Nominal screw torque	0.7 Nm
Screw Dimension	M3 Pozi slot
Mounting	TH35 (EN 60715) or back panel mounting
Storage temperature (no ice)	-40 ... 80 °C
Operation temperature	-40 ... 60 °C
Weight	55 g
Housing material	PA / PC

Included Accessories	
Retaining clip plastic	S30-CM/10 (BAG 10 PCS)

Optional Accessories	
Retaining spring steel	HF-33 (BAG 10 PCS), HF-32 (BAG 10 PCS)
Coding ring	S3-BC (BAG 5 PCS)

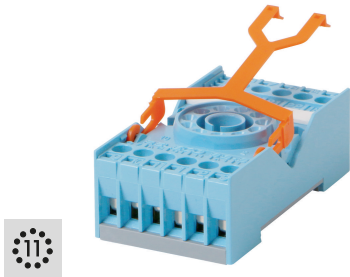


fig. 1. Wiring diagram


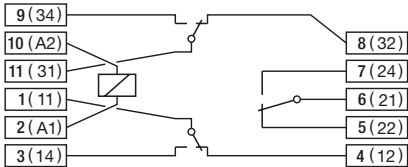


fig. 2. Dimensions (mm)

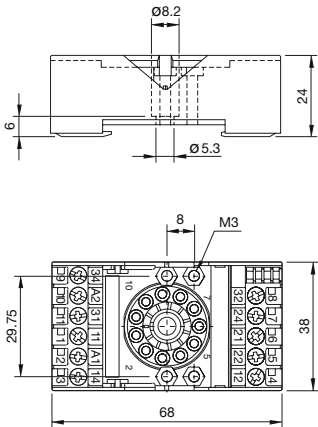

Technical approvals, conformities

Standards EN 60664-1

CE

c

us

REACH

UK

CA

Approvals

SP